

MP2600iec

IEC61131-3 on the Sigma-5 Amplifier

IEC on the Drive






The MP2600iec is a machine controller module fully integrated into Yaskawa's latest Sigma-5 series servo amplifier.

- One software platform, MotionWorks IEC, allows applications to scale up from single to multi-axis control within a standard IEC61131-3 environment
- PLCopen Function Blocks in MotionWorks IEC simplify programming
- Diagnostic Web server reduces field maintenance time.
- Optional OPC server allows for HMI or Data Acquisition
- Sigma-5 autotuning and vibration suppression algorithms provide easy setup
- Wide product range of Sigma-5 (110/230/480 VAC from 50W to 15kW) enables flexible designs



	MotionWorks® IEC EXPRESS	MotionWorks® IEC PROFESSIONAL
Tasks	1	16
IEC61131-3 Languages	Ladder Diagram Function Blocks Structured Text Sequential Function Chart Instruction List	Ladder Diagram Function Blocks Structured Text Sequential Function Chart Instruction List

Programmable Motion with Unmatched Scalability and Modularity

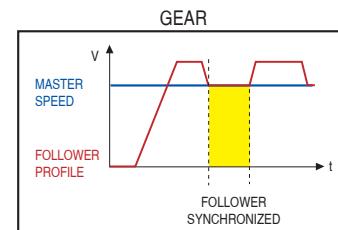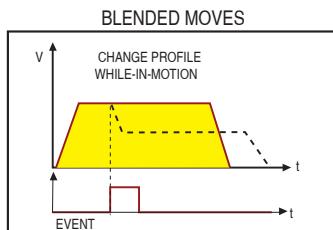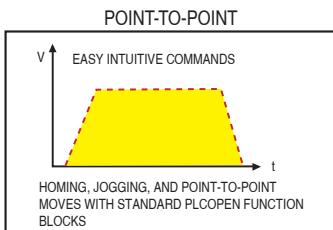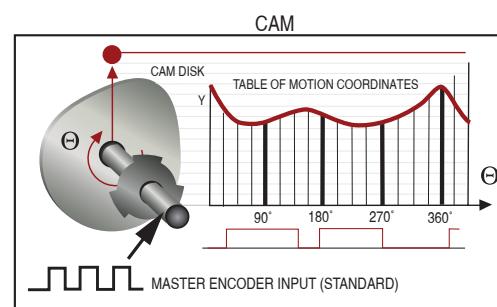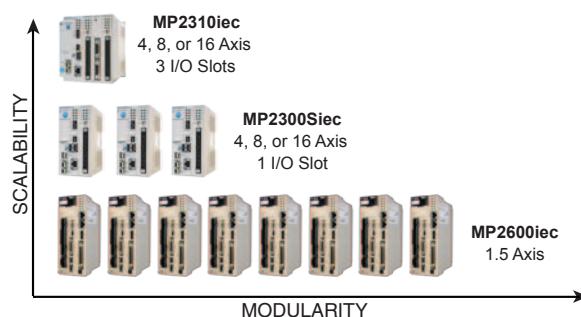

Modbus/TCP

$\Sigma\text{-V}$

MP2600iec

IEC61131-3 on the Sigma-5 Amplifier

MP2600iec Specifications

Item	Specification		
CPU	200 MHz, 32 bit, ARM 9		
Memory	SDRAM	32 MB	
	SRAM	512 kB with battery backup	
	Flash	4 MB flash. Code and parameter storage.	
Operator interface	LED	10 LEDs (red and green - operating mode, communication and error status)	
	User Configuration	6x DIP switch (operating mode and communication configuration)	
User I/O	Controller-Side (CN13)	Network	2x 100baseTX Ethernet
		Digital input	8 programmable inputs
		Digital output	8 programmable outputs
		Analog input	1 ch., +/- 10V, 16 bit
		Analog output	1 ch., +/- 10V, 16 bit
	Pulse counter		RS-422-compatible pulse counter input (quadrature, pulse and direction, and up/down counter modes) with 5, 12, and 24V position latch inputs
	Sequence Input	Allocated*	Number of Inputs: 7 (1 registration input latches external encoder in 5 µs) Functions: The signal allocation and positive/negative logic can be modified. Forward run prohibited (P-OT), reverse run prohibited (N-OT), forward torque limit (/P-CL), reverse torque limit (/N-CL), general-purpose input signal (/SI0 to /SI6)
Servo-Side (CN1)	Sequence Output	Fixed	Servo Alarm (ALM)
		Allocated*	Number of Outputs: 3 Functions: The signal allocation and positive/negative logic can be modified. Positioning completion (/COIN), speed coincidence detection(/V-CMP), servomotor rotation detection (/TGON), servo ready (/S-RDY), torque limit detection (/CLT), speed limit detection(/VLT), brake (/BK), warning (/WARN), near (/NEAR)
Network capability	2 Ethernet Ports (100 Mbps Autocrossover)		OPC (Client and Server required) Ethernet/IP Modbus/TCP
Programming standards	IEC61131/PLCopen		
Diagnostic and configuration interface	Web interface		
Motion control	1 controlled axis and 1 external encoder input plus virtual axis		
Servo-Side Safety Functions	Input	/HWBB1, /HWBB2: Baseblock signal for power module	
	Output	EDM1: Status monitor (fixed output) of built-in safety circuit	

* Allocated I/O can also be used as programmable I/O.

Model Number Designation

